




STEP1

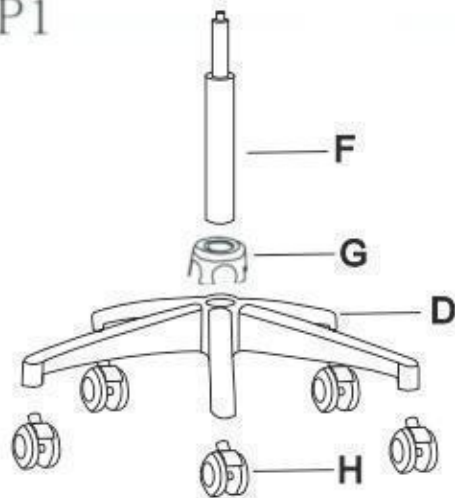


STEP2

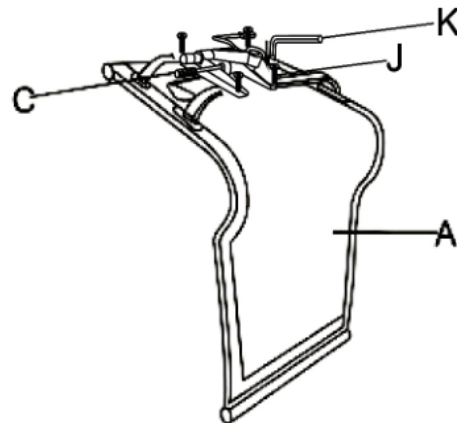

STEP3

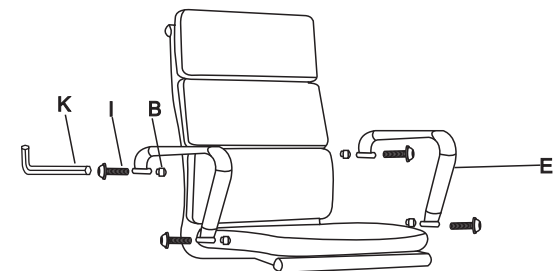

STEP4

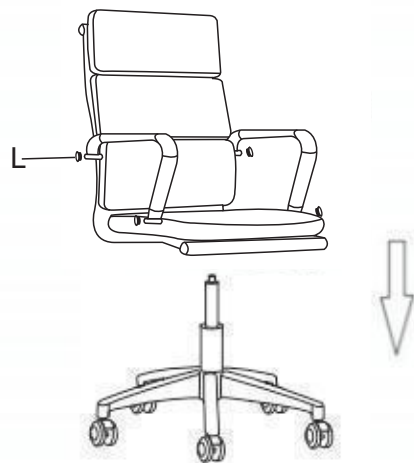

STEP5



" I " is longer screw used for installing the arms, and " J " is shorter screw used for installing the tray.

" B " is used below " I ", and " L " is used above " I ". First, place " B " below " I ", then put them into the arm holes, tighten " I " with " K ", and finally cover " I " with " L ".

A



X1

B



X4

C



X1

D



X1

E



X2

F



X1

G



X1

H



X5

I



X4

J



X4

K



X1

L



X4

SEAT

SCREW CAP

TRAY

FIVE CLAWS

ARMS

GAS LIFT

BRIGHT COVER

WHEELS

8x40SCREW

6x20SCREW

SCREW TOOL

BUTTON