




1 First install the wheels, then the gas lift, and finally the bright cover

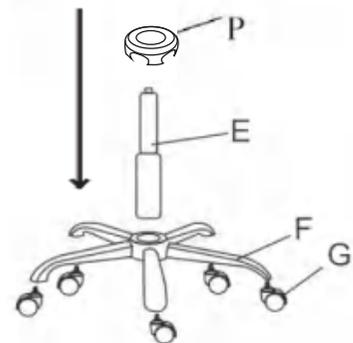

2




3 Diameter 6mmxlength 20mm screw used for slider , use 4 screw.the function of "U" is to fixed the "T"

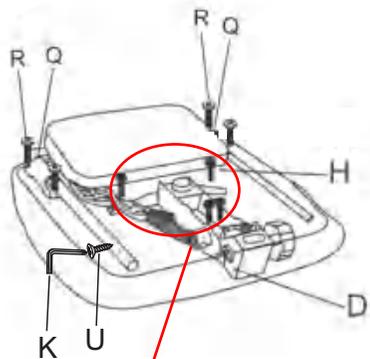

Diameter 6mm xlength 20mm screw used for the tray, total 4 screw


4

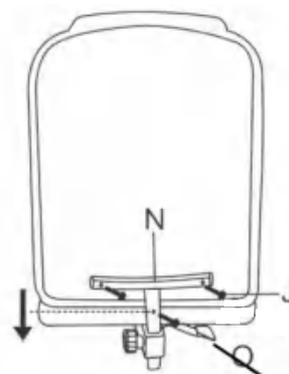

Diameter 6mm xlength 25mm screw used for back rod two sides, Diameter 6mmx length 35mm screw used for the middle

5

Diameter 8mmxlength 40mm screw used for the arms

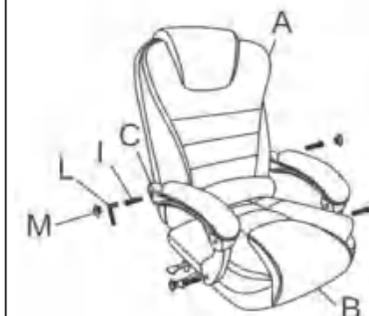

Diameter 6mm xlength 20mm screw used for fixed footrest,use two screw

6*20 SCREW
8*40 SCREW
6*25 SCREW

BACK	A		1PC	K		1PC	TOOL
SEAT	B		1PC	L		1PC	TOOL
ARMS	C		2PCS	M		4PCS	BUTTON
TRAY	D		1PC	N		1PC	BACK ROD
GAS LIFT	E		1PC	O		1PCS	6*35 SCREW
FIVE CLAWS	F		1PC	P		1PC	BRIGHT CAP
WHEELS	G		5PCS	Q		2PCS	SLIDER
	H		4PCS	R		6PCS	6*20 SCREW
	I		4PCS	S		1PC	FOOTREST
	J		2PCS	T		1PC	METAL FRAME
	U		1PC				FIXED SCREW

277-000013